


T-23-07

SLP30-P SERIES
 SCHOTTKY RECTIFIER

GENERAL INSTRUMENT



FEATURES


- Dual rectifier construction, positive center-tap
- Plastic material used carries Underwriters Laboratory Flammability Classification 94V-0
- Metal to silicon rectifier, majority carrier conduction
- Low power loss, high efficiency
- High current capability, low V_f
- High surge capability
- Epitaxial construction
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 250°C/10 seconds .17 (4.3mm) lead lengths at 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: TO-3P, molded plastic
 Terminals: Lead solderable per MIL-STD-202, Method 208
 Polarity: As marked
 Mounting Position: Any
 Weight: .47 ounces, 13.2 ounces

VOLTAGE RANGE
 20 to 45 Volts

CURRENT
 30 Amperes

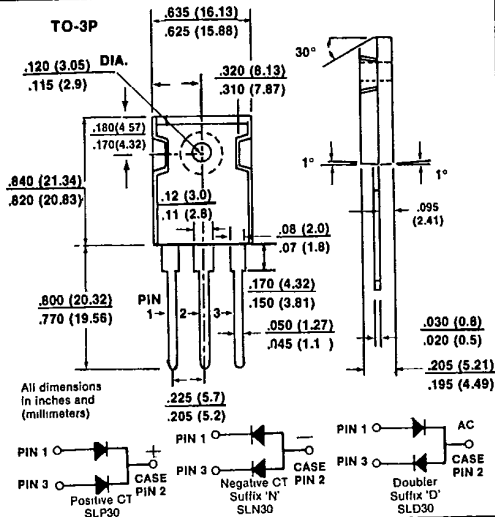

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Resistive or inductive load.
 For capacitive load, derate current by 20%.

	SLP 3020P	SLP 3030P	SLP 3035P	SLP 3040P	SLP 3045P	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	35	40	45	V_{RRM}
Maximum RMS Voltage	14	21	24.5	28	31.5	V_{RMS}
Maximum DC Blocking Voltage	20	30	35	40	45	V_{DC}
Maximum Average Forward Rectified Current at $T_c = 100^\circ C$	30					$A_{(AV)}$
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	250					A_{pk}
Maximum Instantaneous Forward Voltage Per Leg at $I_f = 15A, T_c = 25^\circ C$ (Note 3)	.55					V_{pk}
Maximum Average Reverse Current at Rated $T_c = 25^\circ C$	1.0					mA
DC Blocking Voltage per element $T_c = 100^\circ C$	75					mA
Maximum Thermal Resistance $R_{\theta JC}$ (Note 1)	2.0					$^\circ C/W$
Typical Junction Capacitance (Note 2)	1700					pF
Operating and Storage Temperature Range, T_c, T_{stg}	-40 to +125					$^\circ C$

- NOTES:
 1. Thermal Resistance from Junction to Case.
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
 3. 300 μs Pulse Width, 2% Duty Factor.

T-23-07

**RATING AND CHARACTERISTIC CURVES
SLP30-P**

FIG. 1 — FORWARD CURRENT DERATING CURVE

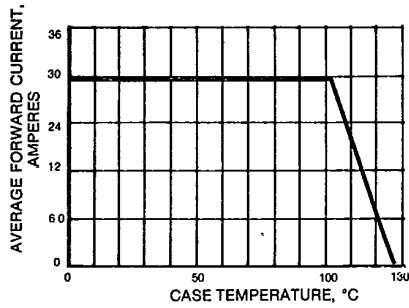


FIG. 3 — MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

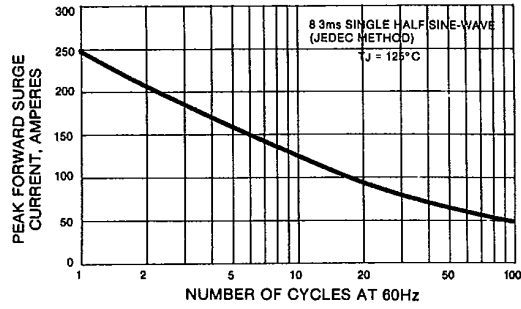


FIG. 2 — TYPICAL REVERSE CHARACTERISTICS

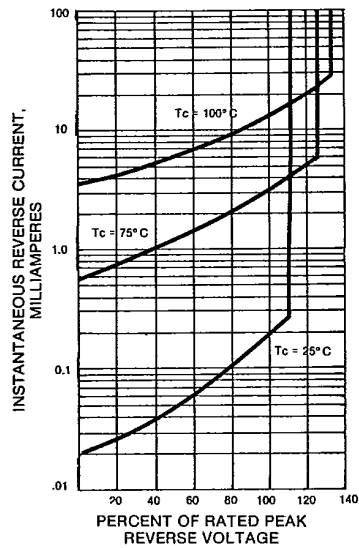


FIG. 4 — TYPICAL FORWARD CHARACTERISTICS PER ELEMENT

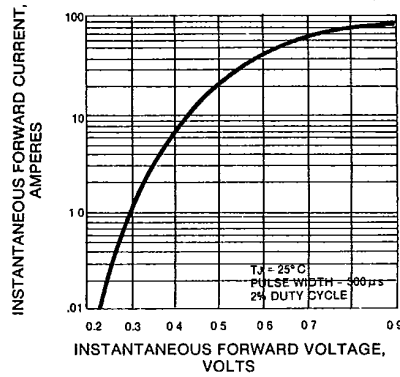


FIG. 5 — TYPICAL JUNCTION CAPACITANCE PER ELEMENT

